

**2022-2027**

**BOND**

**PROGRAM**

City of San Antonio



CITY OF SAN ANTONIO  
**PUBLIC WORKS  
DEPARTMENT**

# **Evans Road Phase 1**

*(East Elm Creek to Masonwood Dr)*

## **Design Public Meeting**

---

December 7, 2023 | Presented by Public Works

# Introductions

---

- District 9 City Council
  - Councilman John Courage
- City Project Team
  - Sean Strong, P.E. – Project Manager
  - Ana Medina, E.I.T – Project Engineer
- City Consultant - Quiddity
  - Nick Garcia – Project Manager

**2022-2027**

**BOND**

**PROGRAM**

City of San Antonio

# Agenda

---

- Project Information
- Project Purpose and Need
- Proposed Improvements
- Project Schedule
- Public Comments and Questions

**2022-2027**

**BOND**

**PROGRAM**

City of San Antonio





PROPOSED 2022-2027

# BOND PROGRAM

City of San Antonio



## INFORMATION GUIDE



# APPROVED

**May 7, 2022**




# Evans Road Phase 1

## Project Information


### ■ Scope

- Construct roadway & drainage improvements
  - Wider sidewalks
  - Curbs
  - Driveway approaches
  - Underground drainage system
- Total Funding: \$17.3 Million
  - Proposition A (Streets, bridges, and sidewalks): \$8.85 million
  - Proposition B (Drainage & Flood Control): \$8.45 million

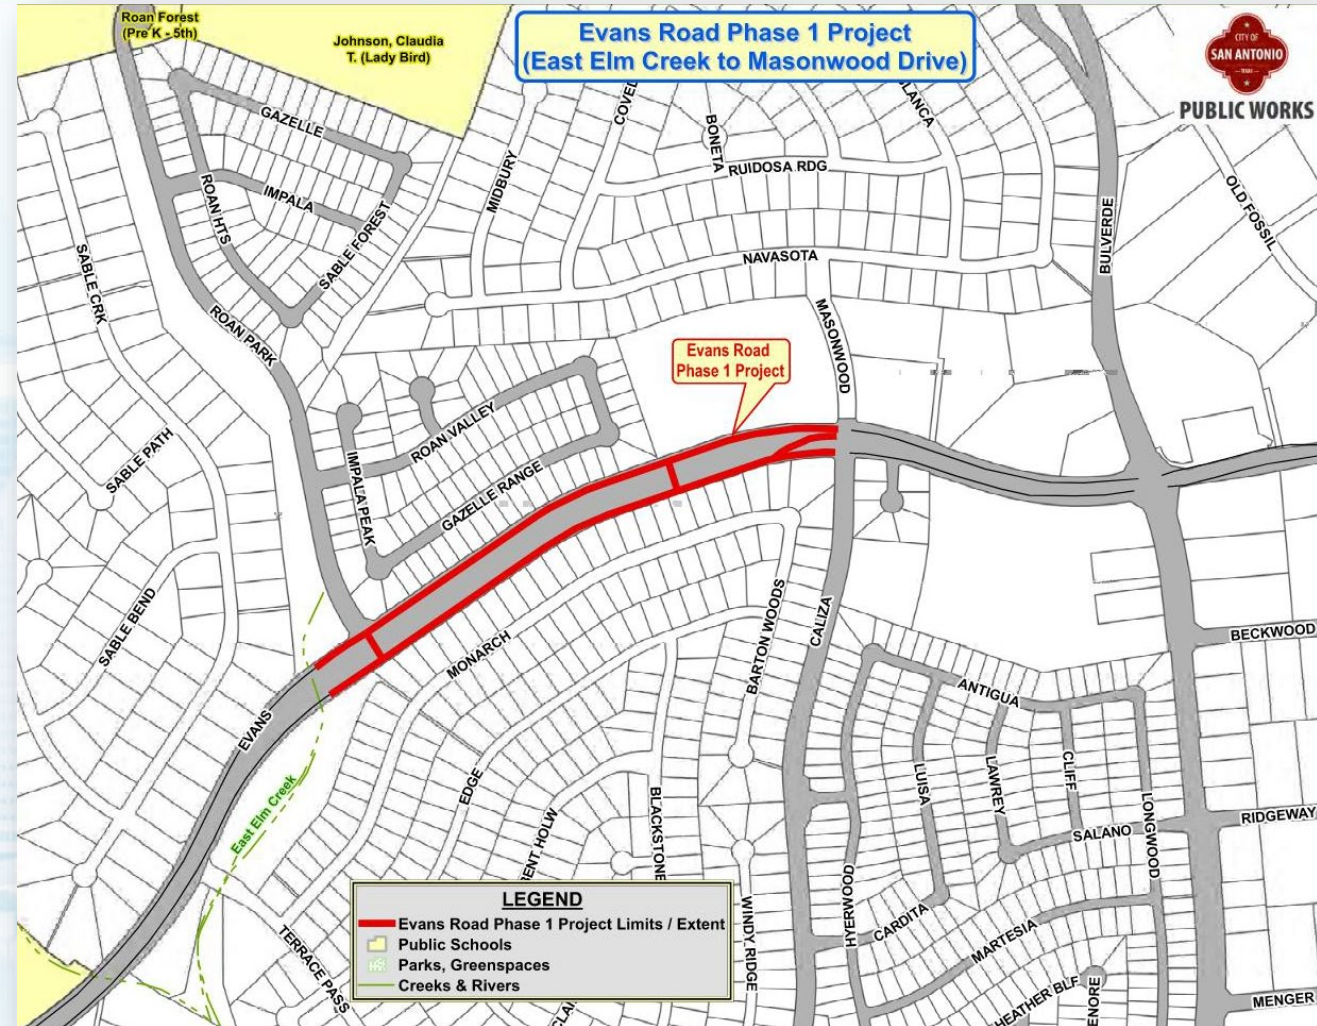

# Evans Road Phase 1

## Project Purpose and Need (Existing Conditions)

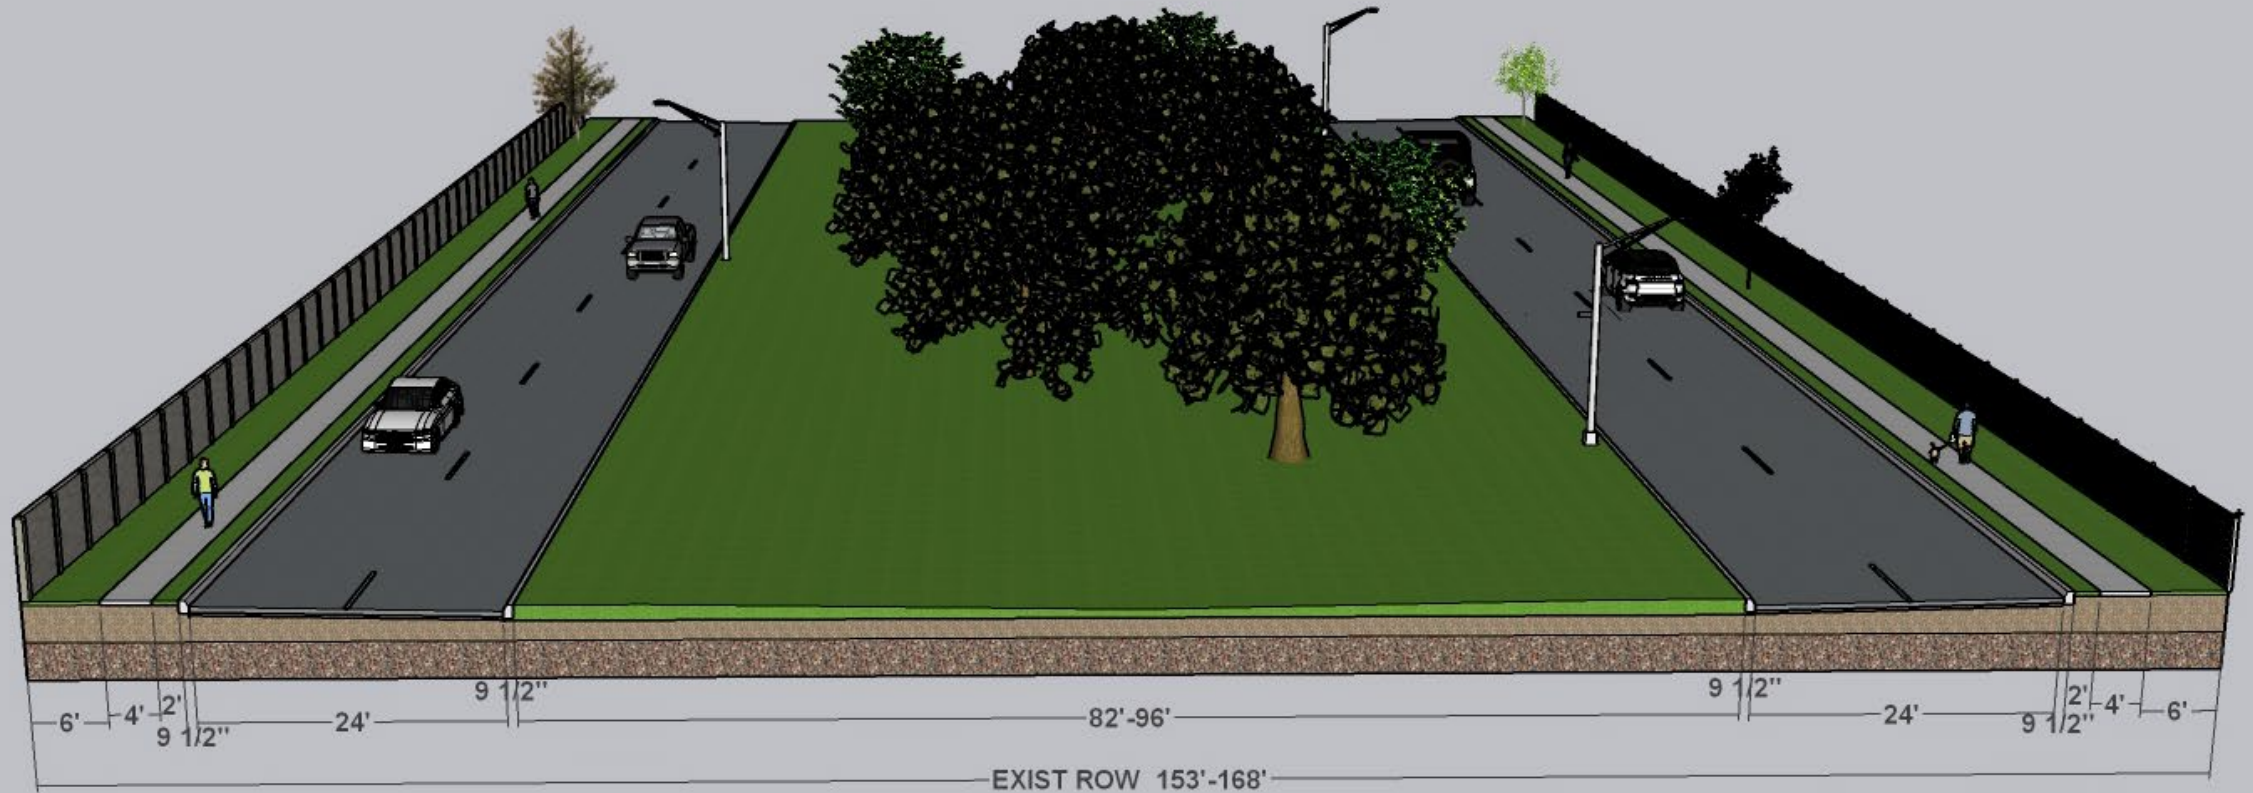



# Evans Road Ph 1

## Project Purpose and Need



### ■ Existing Conditions

- Undersized drainage facilities in project limits.
- Minimal underground storm drainage infrastructure
- Narrow sidewalks
- Curbs nonstandard at varying heights.
- Two twelve-foot travel lanes in each direction.



# Evans Road Phase 1

## Proposed Improvements





# Evans Road Phase 1

## Project Purpose and Need



### ■ Proposed Improvements

#### ○ Roadway

- New pavement
- New 6- to 8-foot-wide sidewalks
- New curbs & gutters to improve roadway drainage
- New pedestrian crossing at Evans & Masonwood

#### ○ Drainage

- New underground storm sewer system
  - 2'-4' diameter underground pipes
  - New inlets
- Improved storm crossing at Roan Park
  - Additional 7'X4' box culvert

**2022-2027**

**BOND**

**PROGRAM**

City of San Antonio

## **Evans Road Project Schedule**

### ■ **Project Schedule**

- Currently in 70% Design
  - Prior to construction:
    - Non joint bid Underground utility relocations
  - Estimated Construction Start
    - Fall 2025
  - Estimated Construction End
    - Fall 2027
-



# COMMENTS/QUESTIONS

---

**Thank you for your attendance  
and listening!**

**Please be sure to sign-up for  
project updates.**

**2022-2027**

**BOND**

**PROGRAM**

City of San Antonio

# CONTACT INFORMATION

---

**Richard Casiano Sr.**

**Capital Projects Officer**

**(210) 207-8218**

**Richard.Casiano@sanantonio.gov**

**CONNECT WITH US!**



**#SA2022Bond | [www.sanantonio.gov/2022Bond](http://www.sanantonio.gov/2022Bond)**